


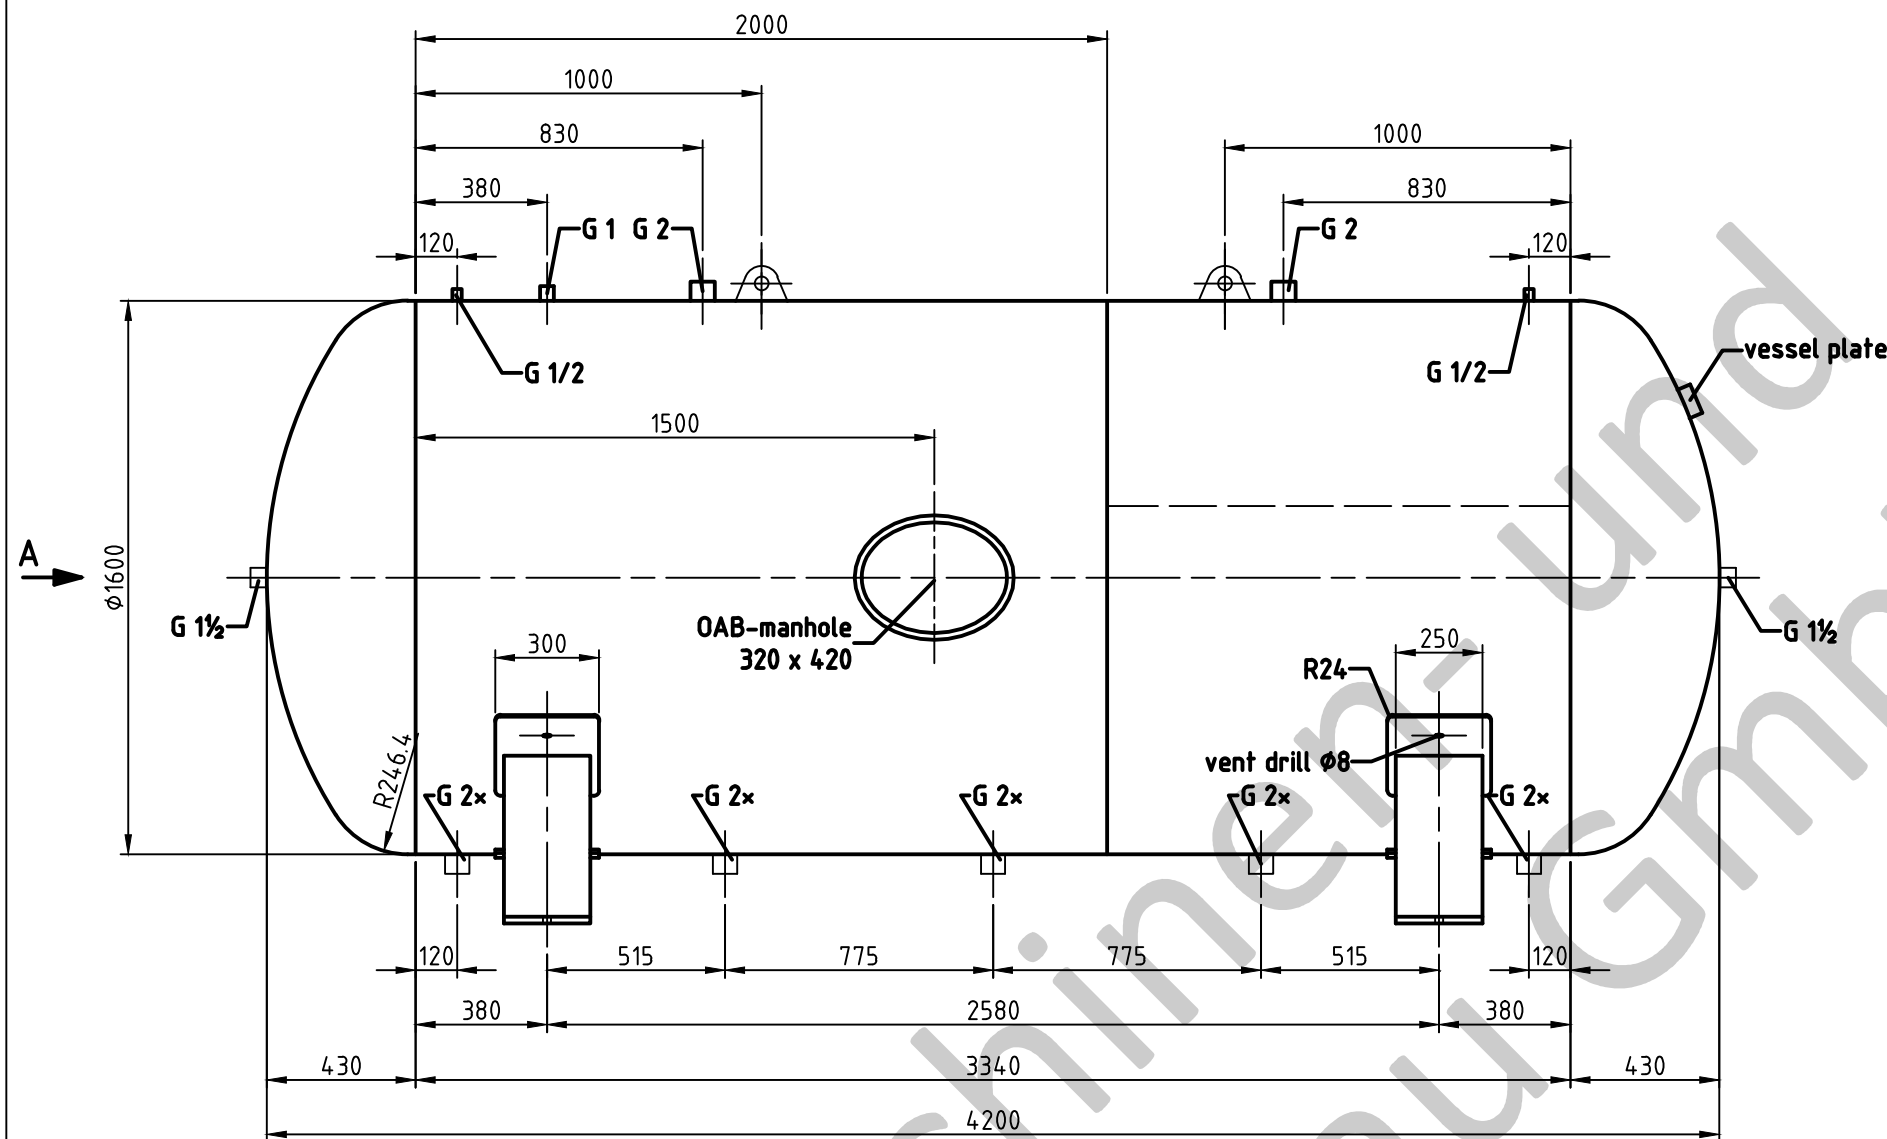


G 2x=G 2 galva.-socket

socket welding



drain and plug socket
inside flush

OAB 51 - manhole lock 320/420
tested components

view A

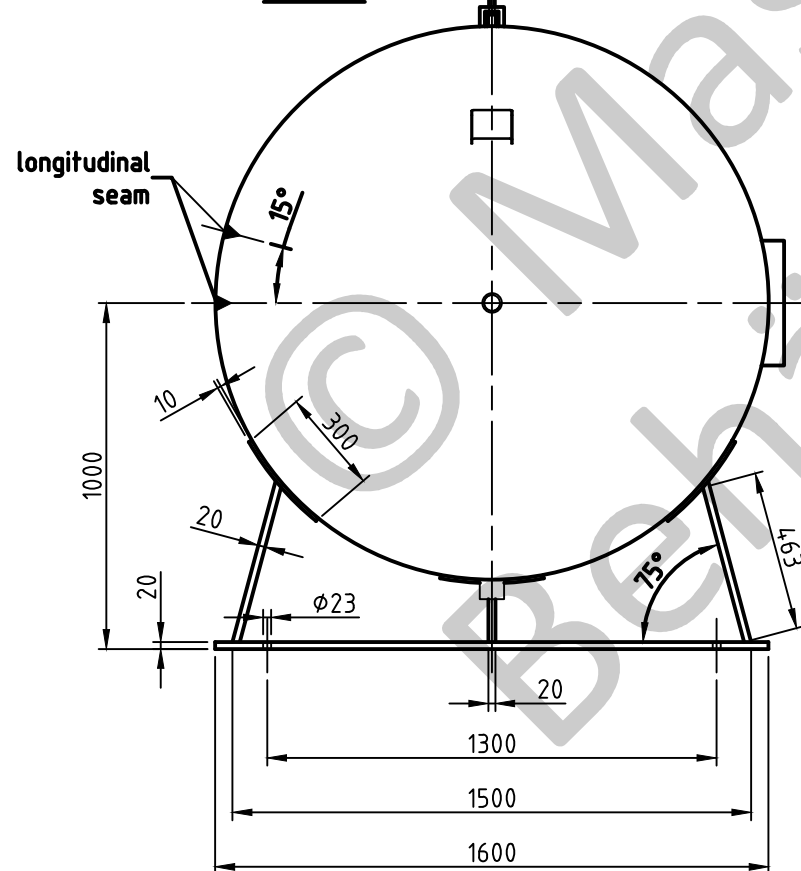

carrier eye

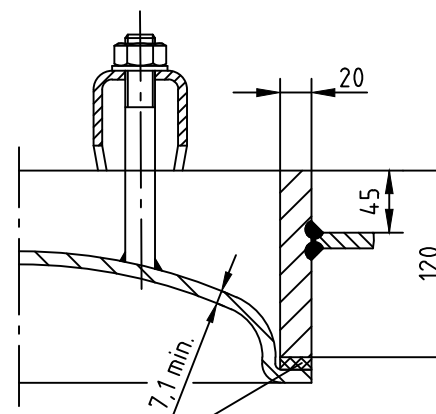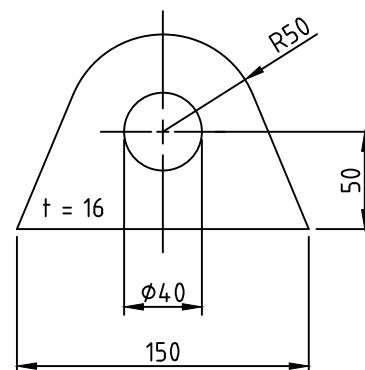

1a rubber gasket up to 70°C

SEAMS (unless otherwise indicated on drawing):

longitudinal seam	socket-/flangeweldings	circumferential seams
		beadseams only up to 8mm wall thickness of bottoms cyl. brim > 3,5 x wall thickness of bottoms

pressure variation :

pressure swing 0-11 bar max. operations 1.000

infinite operation of pressure swing within 20% of 11 bar

operational characteristics / calculation characteristics :

volume V (litre)	: 8000
max. working pressure PS (bar)	: 11
test pressure PT (bar)	: 15,73
min. working temp. TS (°C)	: -10
max. working temp. TS (°C)	: 50
fluid	: compressed air (fluid group 2)
location	: inside and outside building possible

coating :

inside : hot dip galvanized
outside : hot dip galvanized

manufacturing and testing

acc. to PED 2014 / 68 / EU - AD 2000

conformity benchmark :

fluid group : 2	categorie : IV
diagram : 2	module : H1

scale :	1:22.5
our no. :	-
order no. :	-
used for :	M+B Standardvessel
weight :	ca.1530 kg
sheet :	1
of sheet :	1
date of plot :	24.06.2015
file :	ENG-010810

Maschinen- und Behälterbau GmbH	
date	name
compl. 24.06.2015	CW
appr. 24.06.2015	Nota 2
follow protection mark acc. to DIN 34	
Betzdorfer Str. 170 57567 Daaden Tel. 02743/9330-12 Fax 02743/3685 Internet: www.mabe.de E-Mail: cad@mabe.de	

description :

pressure vessel horizontal
8000 l 11 bar

drawing no. :
MB 020102-1.8000V/E

drawing no. of design inspection :

MB 020102-1

revision :

date of revision :
24.06.2015

revision only
on CAD